

LM101




► Features


- 10.1" 1280x800 TFT LCD Panel
- 5 Function keys
- Powered by mini USB connector
- Plug-and-Display
- 1 HDMI, 1 VGA



► Panel

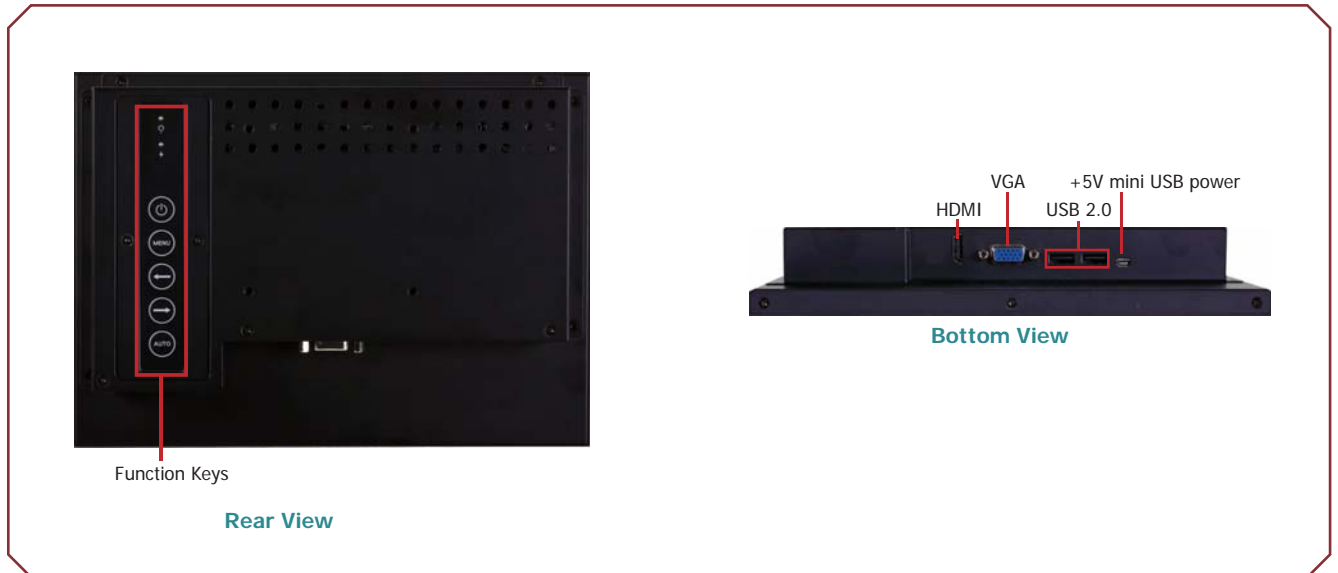

► Dimensions

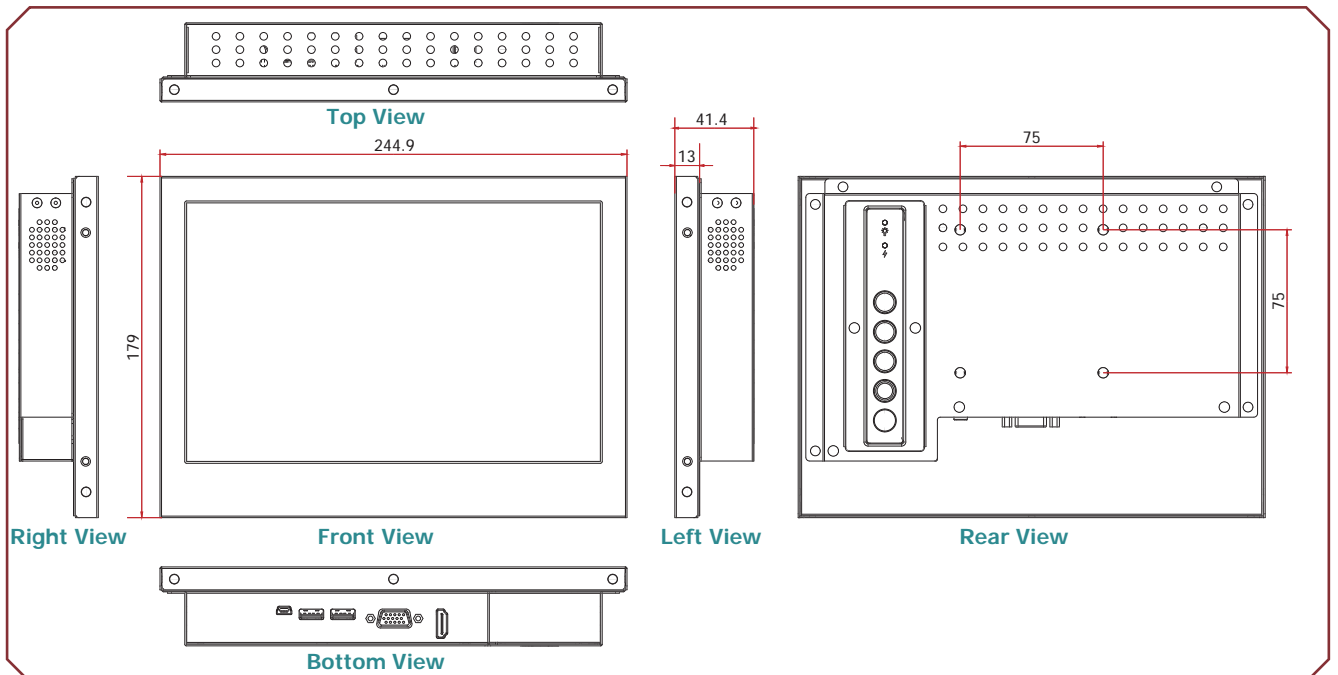

LM101

► Specifications

DISPLAY

- 10.1" 1280x800 TFT LCD monitor
- 300 nits SVGA
- 15,000 MTBF LED backlight

I/O PORTS

- Bottom
 - 2 USB 2.0/1.1 port (Type B)
 - 1 HDMI port
 - 1 VGA port
 - 1 +5V mini USB power connector
- Rear
 - 5 function keys
 - Power LED
 - Standby LED

POWER

- Power input voltage: +5V mini USB power connector

ENVIRONMENT

- Temperature
 - Operating: -20°C ~ 60°C
 - Storage: -30°C ~ 70°C
- Relative Humidity
 - 90% RH at 45°C

VIBRATION

- Operating: 1G, 5~500Hz
- Non-operating: 3G, 5~25Hz
- IEC 68-2-64 compliant

SHOCK

- Operating: 3G peak acceleration (11 msec. duration)
- Non-operating: 10G peak acceleration (11 msec. duration)
- IEC 68-2-27 compliant

CONSTRUCTION

- SGCC

MOUNTING

- Wall mount
 - brackets and screws (optional)

DIMENSIONS

- 244mm x 179mm x 41.4mm (W x H x D)

WEIGHT

- 1.2 kg

► Ordering Information

Model Name	Part Number	Description
LM101-NU	750-LM1010-000G	10.1" Panel PC, 1280x800, mini USB power, display monitor
LM101-RU	750-LM1010-100G	10.1" Panel PC, 1280x800, mini USB power, resistive touch screen monitor

► Packing List

• 1 LM101 system unit
• 1 VGA cable
• 1 USB type A to mini USB power cable
• 1 Quick Installation Guide
• 1 CD disk includes:
- Drivers / Manual

► Wall Mounting

