

# SBL-P4955V1

49" (1/2 cut) Bar LCD  
Open Frame Monitor



The specifications listed in this document are subject to change without prior notice.

28<sup>th</sup> March 2014





## Contents

Page.

3	1. General Description
	1.1 Overview
	1.2 General Specifications
	1.3 Mechanical Specifications
4	2. User Control and OSD
	2.1 Key Control Board
	2.2 OSD Menu System
9	3. Connector Pin Descriptions
	3.1 VGA
	3.2 DVI-D
10	4. Mechanical Drawing

## 1. General Description

### 1.1 Overview

The SBL-P4955V1 is a 49" 1/2 cut bar LCD monitor providing high quality ultra widescreen images from the VGA or DVI inputs. The original 55" panel is 1/2 cut to produce a 49" display with a resolution of 1920 x 524 pixels.

### 1.2 General Specifications

Panel Details	Size	49" Diagonal (55" 1/2 cut)
	Native Resolution	1920 x 524
	Active Display Area	1209.6 x 330.12 mm
	Pixel Pitch	0.630 x 0.630 mm
	Colour Depth	10-bit , 1.06 billion
	Surface Treatment	Hard Coating (3H), anti-glare
	Viewing Angle	H: 178°, V:178° (Typ.)
	Contrast Ratio	1200:1 (Typ.)
	Brightness	1000 cd/m <sup>2</sup> (Typ.)
Refresh Rates	All Input Resolutions	60Hz
Input Interface	VGA	15-pin D-SUB
	DVI	24-pin DVI-D
Power Interface	DC Input	+12Vdc or +24Vdc
	Power connector	DC Jack (2.5mm)
	Max. Power Consumption	TBD
Environmental Conditions	Operating Temperature	0 to 50°C
	Storage Temperature	-20 to 60°C
	Operating Humidity	10 to 90 % <sup>RH</sup>
MTTF		50,000 hours (Typ.)
Board kit options	SBL-P4955V1-SD1	Standard board
	SBL-P4955V1-SD5	Advanced board (IR, thermal & brightness control, audio)


### 1.3 Mechanical Specifications

Outer Dimensions	Width	1255.6mm
	Height	376.2mm
	Depth	33.6mm *1
Chassis	Construction	Steel

\*1 LCD panel only depth. Total unit depth is dependent upon board kit location, and can be made to customer specification.

## 2. User Control and OSD

### 2.1 Key Control Board

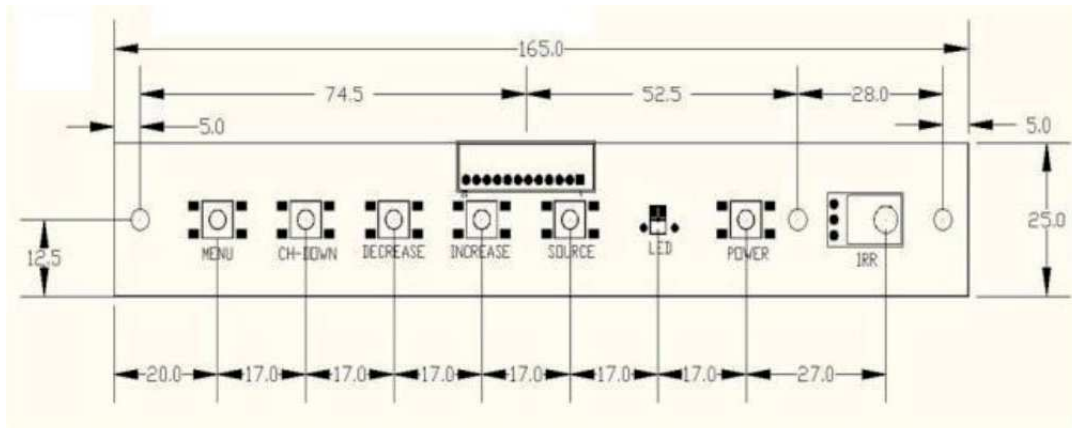

### 9.2 OSD Key Description


Symbol	Description
MENU	Menu display or sub item selection and exit to the previous menu level.
DOWN	Move sub items.
DECREASE	Value Decrement
INCREASE	Value Increment
SOURCE	Source selection

### 9.3 Hot Key Description

Symbol	Description
DOWN	Auto Adjust, VGA input only
DECREASE	Brightness adjustment.
INCREASE	Brightness adjustment.




## 2.2 OSD Menu System

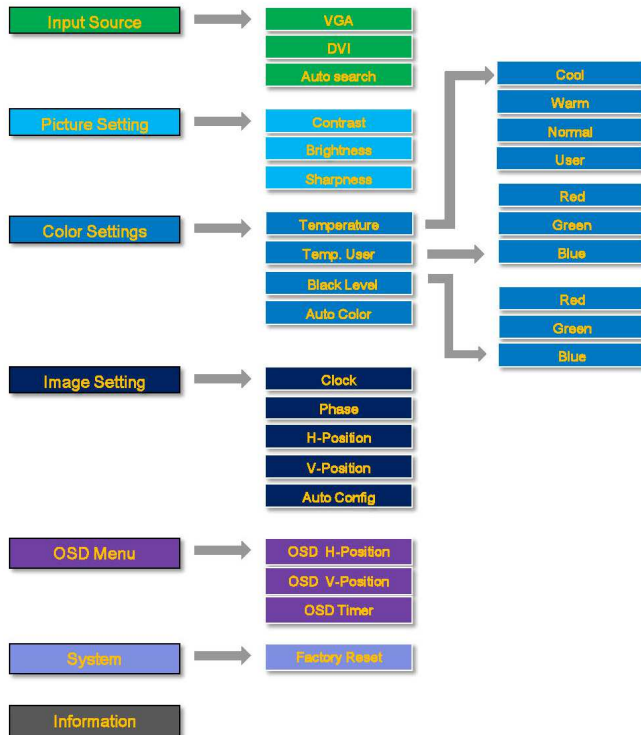

### [Note]

1) Image setting menu is available for only VGA input source.


## MAIN MENU & INPUT SOURCE

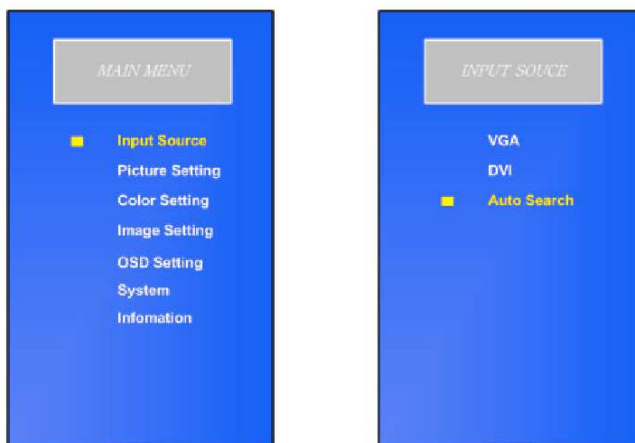

- **VGA** : VGA Input signal select
- **DVI** : DVI Input signal select
- **Auto Search** : Input signal auto search



## PICTURE SETTING

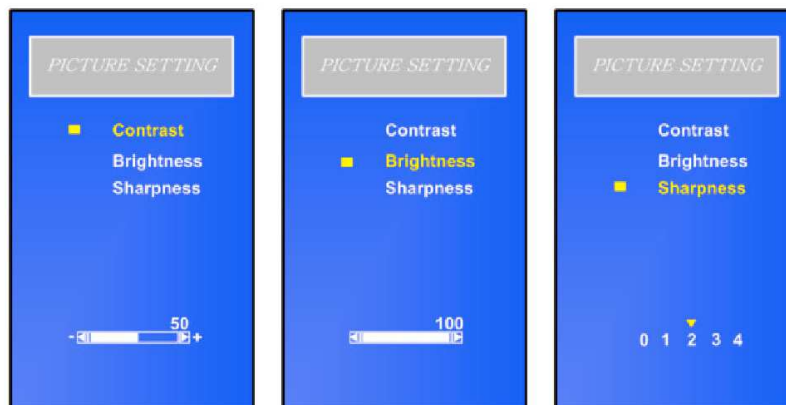

- **Contrast** : Adjust contrast of the screen
- **Brightness** : Adjust brightness of the screen
- **Sharpness** : Adjust sharpness of the screen

## COLOR SETTING



- **Color Temp**
  - ❖ **Cool** : Blue-tinged screen
  - ❖ **Warm** : Red-tinged screen
  - ❖ **NOR** : Select Normal screen
  - ❖ **User** : Adjust R,G,B value of color temperature
- **Temp. User<sup>1)</sup>**
  - ❖ **Red** : Adjust R value of the User color settings
  - ❖ **Green** : Adjust G value of the User color settings
  - ❖ **Blue** : Adjust B value of the User color settings

### [Note]

1) Temp.User is available for Temperature User menu.

## IMAGE SETTING




- **Clock** : Adjust the clock of the screen
- **Phase** : Adjust the phase of the screen
- **H-Position** : Adjust horizontal position of the screen

### [Note]

1) Image setting menu is available for only VGA input source.

## IMAGE SETTING

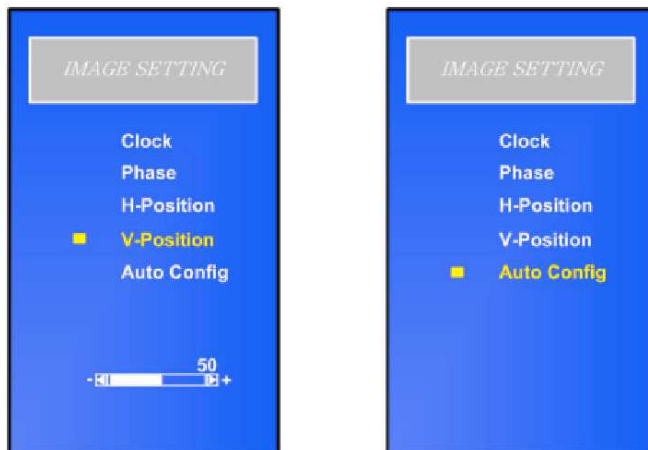

- **V-Position** : Adjust vertical position of the screen
- **Auto Config** : Execute auto adjust for phase, clock and position

### [Note]

1) Image setting menu is available for only VGA input source.



## OSD SETTING



- **OSD H-Position** : Adjust horizontal position of the OSD
- **OSD V-Position** : Adjust vertical position of the OSD
- **OSD Timer** : Select OSD turn-off time

## SYSTEM & INFORMATION



### SYSTEM

- **Factory Reset** : Initialize OSD value.

### INFORMATION

- **Input Source** : Information of the main source
- **Mode** : Information of the Resolution
- **Version** : Software version





### 3. Connector Pin Descriptions

#### 3.1 VGA

- Analog RGB Input Connector  
Connector : Mini D-Sub 15pin(P202) made by ARC

Pin No.	Symbol	Description	Pin No.	Symbol	Description
1	RED	Analog red signal	9	+5V	+5Vdc
2	GREEN	Analog green signal	10	SGND	Sync ground
3	BLUE	Analog blue signal	11	NC	No connection
4	GND	Digital ground	12	SDA	DDC data
5	GND	Digital ground	13	HSYNC	Horizontal sync
6	RGND	Red return	14	VSYNC	Vertical sync
7	GGND	Green return	15	SCL	DDC clock
8	BGND	Blue return			

#### 3.2 DVI-D

- DVI-D Input Connector  
Connector : DVI-D (P201) made by Foxconn

Pin No.	Symbol	Pin No.	Symbol	Pin No.	Symbol
1	TMDS data 2-	9	TMDS data 1-	17	TMDS data 0-
2	TMDS data 2+	10	TMDS data 1+	18	TMDS data 0+
3	TMDS data 2/4 Shield	11	TMDS data 1/3 Shield	19	TMDS data 0/5 Shield
4	TMDS data 4-	12	TMDS data 3-	20	TMDS data 5-
5	TMDS data 4+	13	TMDS data 3+	21	TMDS data 5+
6	DDC clock	14	+5Vin	22	TMDS clock shield
7	DDC data	15	Ground (for +5Vin)	23	TMDS clock +
8	No connection	16	Hot plug detect	24	TMDS clock -



## 4. Mechanical Drawing

