


PMB-881LF



ATX MB supports Intel® Xeon® E3 and 2nd Gen. Core™ i3 CPU with VGA/ DP/ Audio/ 4COM/ 2LAN

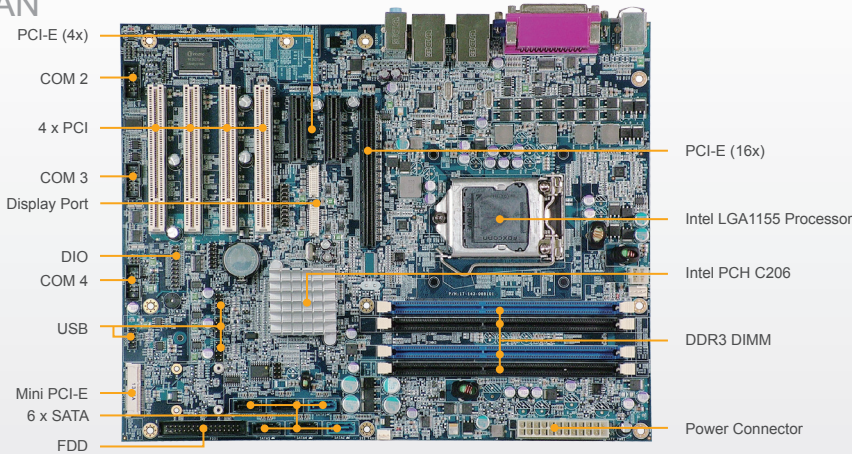

Features

- LGA1155 Intel® Xeon® E3 and 2nd Gen. Core™ i3 Quad / Dual core processor
- Equipped with Intel® C206 Chipset
- Memory supports four DDR3 DIMM socket 1333/1066 up to 32 GB (support ECC, non-ECC)
- Support Dual Gigabit Ethernet
- Support SATA RAID 0, 1, 5, 10,
- Expansion Slots for one PCIe(16x), two PCIe(4x), four PCI slot and one Mini PCIe

Specifications

System

CPU Support	Intel® Xeon® E3 and 2 nd Gen. Core™ i3 processor
CPU Frequency	E3-1275: 3.4GHz E3-1225: 3.1GHz i3-2120: 3.3GHz Pentium G850: 2.9GHz
Chipset	Intel® PCH C206
DRAM	4 x 240-pin DDR3 DIMM, support dual -channel 1333/1066Hz SDRAM ECC and Non-ECC Unbuffered DIMM (system max. 32GB)
BIOS	AMI BIOS
Watchdog	1~255 secs Watchdog timer selectable
Power Supply	Support ATX Power
Power Consumption	+5V:1.6A ; +12V:6.8A ; +3.3V:0.7A ; +5VSB:0.25A (CPU: Xeon E3-1275 3.4GHz)
Dimension	305 mm x 244 mm (12" x 9.6")
Certificate	FCC / CE
OS Support	Windows 7, Windows Vista, Windows XP SP3

I/O Ports

SATA Interface	2 x SATA III (6.0Gb/s), 4 x SATA II (3.0Gb/s), (Raid 0,1,5,10)
IDE Interface	1 x FDD connector
Expansion BUS	1 x PCIe(16x) , 2 x PCIe(4x) , 4 x PCI slot , 1x Mini PCIe
TPM	TPM1.2 with 20-pin header on board for TPM (Trusted Platform Module)
Serial Port	4 x COM port, COM 1/3/4 for RS-232, COM 2 for RS-232/422/485
Parallel Port	1 x Parallel port (SPP/EPP/ECPP)
IrDA	1 (SIR)
Keyboard	PS/2 Connector, with mini DIN connector
Mouse	PS/2 Connector, with mini DIN connector
LAN	LAN 1: Intel® 82579LM (10/100/1000 Mbps) LAN 2: Intel® 82583V (10/100/1000 Mbps) Support Wake-on-LAN with ATX power
Audio	High Definition Audio; Realtek ALC888S with Mic / Line-In / Line-Out
DI/O	8 in / 8 out
USB	12 x USB 2.0

Display

Graphics	Build-in processor, share system memory Support 1 x VGA 2 x Display port
----------	--


*Discrete graphic card is necessary for display if the chosen CPU doesn't have integrated graphics support.

Environment

Operation Temp.	0° ~ 60° C (32° ~ 140° F)
Storage Temp.	- 40° ~ 85° C (- 40° ~ 185° F)
Humidity	Operation humidity 5 ~ 90% (non-condensing)

*All information contained in this document is subject to change without prior notice. Please log on www.protech.com.tw to acquire latest information.

I/O Panel View

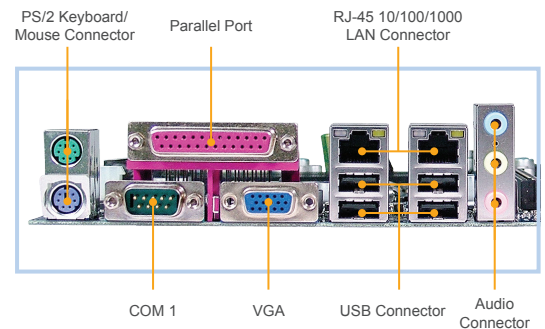

Ordering Information

Order No	Description
BA-0881RA-01P	ATX MB with Intel® Xeon® E3 and Core™ i3 (LGA1155) with C206 / VGA/Audio/2LAN(1G)/4COM/Raid

Packing List

Part No	Description
10-611-00200123	Jumper (2.0mm)
20-010-03011000	I/O Shield
27-008-00001031	SATA cable
50-099-08810000	Quick Guide Driver CD

Ordering Accessories

Part No	Description
27-024-05206011	COM port cable w/ bracket
27-006-00004111	Dual USB2.0 cable w/ bracket
27-006-00007111	4 Port USB2.0 cable w/ bracket
27-001-55036031	FDD cable
81-003-18025144	CPU Cooler (for 65W CPU)
TBD	CPU Cooler (for 95W CPU)
27-047-00006112	DP to DVI cable

Order No	Description
BR-4010RA-01P	TPM Module (2.0/2.54mm)
BR-8080RA-00P	DP/eDP to LVDS Daughter Board
BR-6061RA-00P	4 UART (RS232) Half Size Card
BR-6061RA-03P	4 UART (RS422/485) Half Size Card

Protech Systems Co., Ltd.

No. 24, Lane 365, Yang Gsang Street,
Nei Hu District Taipei 114, Taiwan R.O.C.
TEL: +886-2-8751-1111

Protech Technologies Inc.

950 Fee Ana St, Suite B
Placentia, CA 92870
TEL: +1-714- 996-7200

Protech Japan Co., Ltd.

OSK Bldg, 6F, 6-25-14, Minami-ohi
Shinagawa-ku, Tokyo, 140-0013
TEL: +81-3-5753-8411

PROX SYSTEMS Germany GmbH

Weststrasse 20a, 40721 Hilden
düsseldorf, Germany
TEL: +49 (0) 2103-41898-18